

Olympia XLow

11662 The Olympia Hospital XLow bed is a perfect symbiosis of safety and comfort. A low bed position of \pm 25 cm reduces the risk of falling out of the bed considerably, whereas an ergonomic working height of \pm 80 cm guarantees efficient care.



Carriage

- Utmost stable high/low adjustment by means of supporting arms.
- (Reverse) Trendelenburg adjustment up to $\pm 17^\circ$.
- Linea twin castors Ø 125 mm, with central brakes.
- Ergonomically designed chromium-plated brake bracket to activate the central brake mechanism.

- Brake bracket accessible in all bed positions.
- Sufficient clearance height to use a bed hoist.
- The bed can be moved in each position, except in the safety position (= lowest position).

Mattress platform

- Four-section mattress platform.
- The backrest is electrically adjustable up to $\pm 70^\circ$ with autoregression.
- A telescopic backrest safety prevents the patient from getting stuck during an inclination.
- The backrest is equipped with an inclination indicator.
- The knee rest is electrically adjustable up to $\pm 34^\circ$ (in case of 4-sections).
- The legrest or footrest is manually adjustable.
- The electric manipulation of the mattress platform sections is equipped with a safety to prevent the patient from getting stuck.
- Manual quick release of the backrest.

- Mattress platform with rounded steel mattress platform profiles.
- Standard equipped with cutouts for patient restraint straps.
- The backrest and footrest are equipped with 2 integrated mattress holders.
- Telescopic bed extension possible up to 20 cm.
- The 4 bed corners are equipped with integrated bumpers.
- The 4 bed corners are equipped with cases to install an IV rod or a lifting pole.
- The side beams on both sides are equipped with 3 accessory hooks.


Electric bed manipulations

- The electric functions are activated by means of a hand switch.
- The hand switch is equipped with a preprogrammed sleeping function. The hand switch can also bring the bed to seat height, so that the patient can get out of the bed without any problems.

- The hand switch can switch off several functions selectively by means of a magnetic key.
- Battery with alarm signal.
- Equipotentiality point.

Dimensions and technical data

- Width: 100 cm, Length: 212 cm
- Height variation of the mattress platform: \pm 25 cm - \pm 80 cm
- Safe working load: 230 kg
- Mattress platform dimensions: 204 x 86 cm
- Mattress dimensions: 195 x 85 cm, thickness: 12 to 15 cm

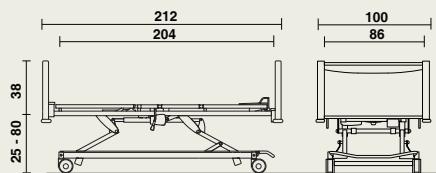

Materials and finishing

- Metal.
- Solid laminate.
- Epoxy-coating RAL 9006 white aluminium or chromium-plated.
- Self-lubricating synthetic hinges (= maintenance-free).
- Withstands the common cleaning products and disinfectants.

For more information about the materials and construction: please consult our material files.
We would like to refer to our extensive colour gamut.

Options

- Mattress platform with removable synthetic sections.
- Mattress platform with solid laminate mattress platform sections; thickness 6 mm.
- Footrest extension up to 20 cm.
- Sideguards.
- Wall spacer.
- Electromechanical quick release (CPR).
- Linen holder.
- Nightlight under bed.
- Reading lamp.
- High/low pedal.
- Linea twin castors Ø 150 mm, with central brakes.

Panel types

- Jaro

Sideguards

- Trix (*)

Accessories

We refer to our extensive accessory list.

(*) Option

